



Softec I: Quality Meets Value

- » Single-piece acrylic
- » Proven C-loop design
- » Always right-way design
- » Uniplanar bi-convex





Softec I Technical Specifications⁺

Optic Size	5.75 mm
Optic Type	Equicovex (+1.0 to +36.0D) Meniscus (-5 to 0.0D)
Optic Type (US Only)	Equiconvex (+5.0 to +36.0D)
Length	12.00 mm
Haptic Style	Modified C
Angulation	0 Degrees
Positioning Holes	0

[†]The A-Constant and ACD values printed are estimates only. It is recommended that the surgeon determine his or her own values based on their individual clinical experience.

Constants (Optical Interferometry):*

Immersion	A = 118.3
SRK/T	A = 118.3
Holladay1	sf = 1.39
Hoffer Q	pACD = 5.14

*i.e. Using IOL Master, LENSTAR Optical Biometers

Diopter Steps:


Whole - US Only	+5.00 to +36.00
Whole	-5.00 to +36.00
Half	+10.50 to +29.50

Uniplanar Design

The Softec I is a C-Loop, one-piece hydrophilic acrylic lens with a equiconvex design and equal biconvex spherical optic with square-edge technology.



360-Degree Square Edge Technology

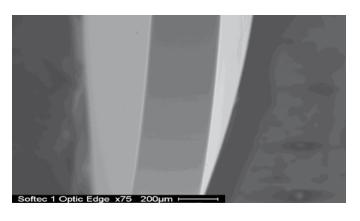

Proven Quality - FDA Approved

Lenstec is one of eight companies in the world approved by FDA (Food and Drug Administration) to sell intraocular lenses in the U.S. market. All products have CE certificate, are approved by BSI (British Standards Institute) and are ISO quality system certified.

World Headquarters

Lenstec, Inc. 1765 Commerce Ave. N. St. Petersburg, FL 33716 USA

Tel: 727-571-2272 Fax: 727-571-1792 Email: lenstec@lenstec.com

Lenstec Barbados

Lenstec Barbados Inc. Airport Commercial Centre Pilgrim Road, Christ Church BARBADOS BB17092

Tel: 246-420-6795 Fax: 246-420-6797 Email: lenstecbarbados@lenstec.com

Lenstec UK

Lenstec Barbados Inc. Lenstec House Unit 8, Mariner Court Calder Park, Wakefield West Yorkshire WF4 3FL England

Tel: +44 (0)1924 382 678 Fax:+44 (0)1924 850 454 Email: lenstecuk@lenstec.com



